




- 楔形三爪大貫通孔徑。
  - 摺動面均經硬化及精密研磨，並直接潤滑。
  - 高剛性結構及高夾持精度。
  - WEDGE-HOOK type 3-jaw with the large through-hole.
  - Matching surfaces of all parts hardened, ground and lubricated directly.
  - High rigidity and high clamping accuracy.
- J 值為連結螺帽未車製螺牙時之孔徑。  
K Default 值為未指定規格之出廠值。  
K max 值為連結螺帽可車製螺牙之最大規格，可依實際需求訂製。
  - J is the hole diameter of blank draw nut.  
If not notified, Autogrip will adopt the K Default as K value.  
K is the maximum thread specification and it could be customize.

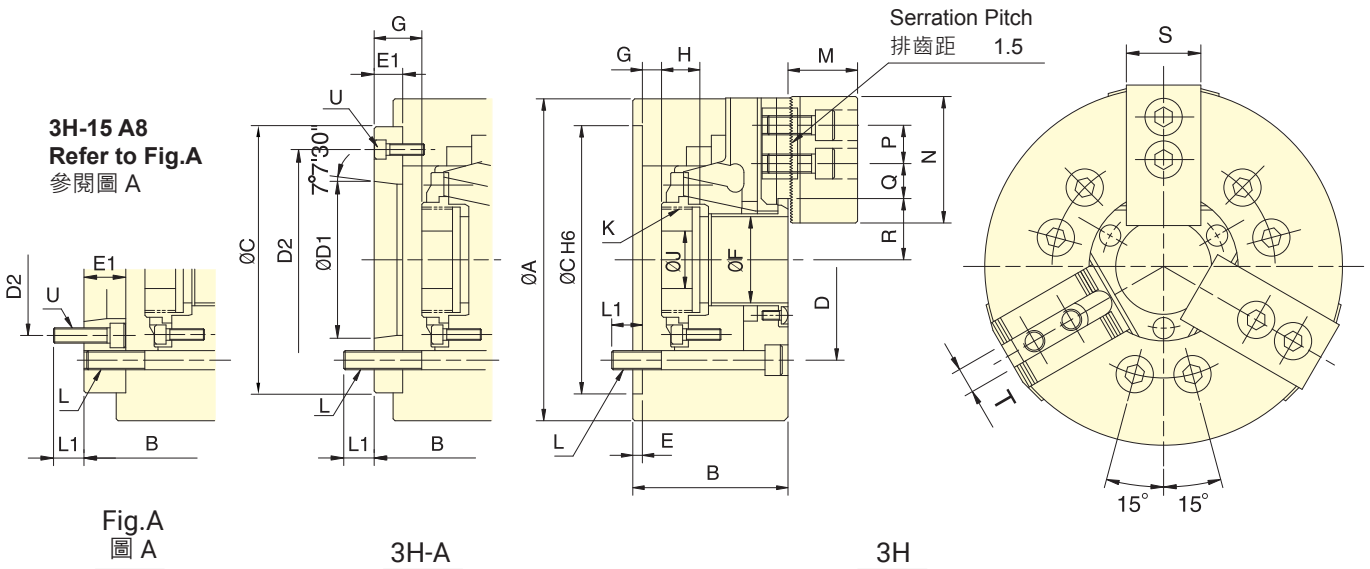

保留規格修改的權利  
Subject to technical changes

### 技術規格 SPECIFICATIONS

型號	楔心行程 Plunger stroke	爪行程 (直徑) Jaw stroke (Dia.)	夾持直徑 Chuck Dia.		容許油壓缸 推力 Max. D.B. pull	最大夾持力 Max. Clamping force	最高迴轉數 Max. speed	I	重量 Weight	適用迴轉缸 Matching cyl.	最大使用壓力 Max. pressure		
			最大 Max.	最小 Min.								mm	mm
3H-12	A8	25	10.6	304	34	54.9(5600)	143.7(14650)	3300	0.77	56.6	59.3	TK-A1291	2.5(25)
3H-15	A8	25	10.6	381	20	71(7250)	179.8(18350)	2500	2.28	120	134	TK-A1512	2.3(23)
3H-15	A11	25	10.6	381	20	71(7250)	179.8(18350)	2500	2.39	120	127	TK-A1512	2.3(23)
3H-18	A11	23	10.6	450	50	71(7250)	179.8(18350)	2000	4.78	164	178	TK-A1512	2.3(23)

### 外型尺寸 DIMENSIONS

Model	A	B	C	D	D1	D2	E	E1	F	G max.	G min.	H	J				
3H-12	A8	304	110	122	220	171.4	139.72	190	6	18	91	10	28	-15	3	28	50
3H-15	A8	381	132	159	300	235	139.72	171.4	6	33	120	11	44	-14	19	39	60
3H-15	A11	381	132	148	300	235	196.87	260	6	22	120	11	33	-14	8	39	60
3H-18	A11	450	133	149	300	235	196.87	260	6	22	120	11	33	-12	10	39	60

Model	K Default	K max.	L	L1	M	N	P	Q max.	Q min.	R max.	R min.	S	T	U				
3H-12	A8	M100x2	M100x2	6~M16	23	25	51.3	130	30	46.25	11.75	61.3	56	50	21	3~M8		
3H-15	A8	M130x2	M100x2	M130x2	M115x2	6~M20	30	24	63	165	43	49.75	19.75	77.5	72.2	62	25.5 or 22	6~M16
3H-15	A11	M130x2	M130x2	M130x2	6~M20	30	28	63	165	43	49.75	19.75	77.5	72.2	62	25.5 or 22	3~M10	
3H-18	A11	M130x2	M130x2	M130x2	6~M20	30	28	63	165	43	83.5	20.5	80	74.7	62	25.5 or 22	3~M10	

1. 紅色數據為 3H-A 型之寸法 (The dimensions and the specifications of 3H-A type are in red data.)